KITCHEN

COLLECTION

SANTOSHI

INTERIORS



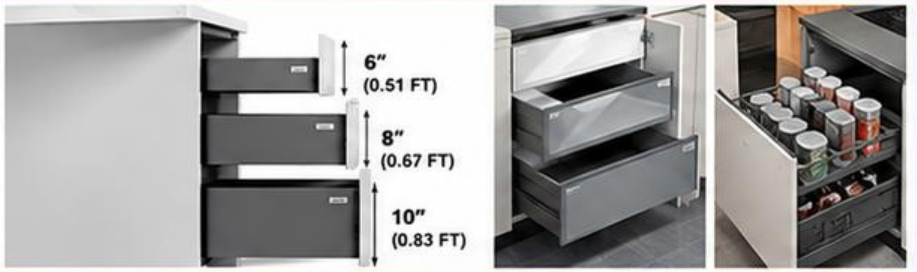
SANTOSHI INTERIORS

CUSTOM KITCHEN

MODULAR PRODUCT

SR NO	Description	PER SQ FT/QTY	MODEL	Pictures
1	Providing and fixing 18 mm thick plywood with wooden laminate press finish, including external decorative laminate, internal laminate finish, soft-close hinges, necessary hardware fittings, adhesive, edge banding, cutting, assembly, installation, and finishing, complete as per approved design and actual site dimensions.	1300 SQ FT	E1	
2	Providing and fixing 18 mm thick plywood with premium PU (Polyurethane) paint finish on external surfaces and internal laminate finish, including soft-close hinges, necessary hardware fittings, adhesive, edge banding, surface preparation, primer, PU paint coating, cutting, assembly, installation, and complete finishing as per approved design and actual site dimensions.	1600 SQ FT	E2	
3	Providing and fixing 18 mm thick plywood with premium acrylic sheet finish on external surfaces and internal laminate finish, including soft-close hinges, necessary hardware fittings, adhesive, edge banding, cutting, assembly, installation, and complete finishing as per approved design and actual site dimensions.	1600 SQ FT	E3	
4	Providing and fixing drawers manufactured from 18 mm thick plywood with internal laminate finish and external finish options including Wooden Laminate Press, Premium Paint Finish, or Acrylic Sheet Press Finish, complete with premium soft-close drawer channels, handles, necessary hardware fittings, adhesive, edge banding, cutting, assembly, installation, and finishing as per approved design and actual site dimensions.	1800 PER QTY	E4	

SR NO	Description	PER SQ FT/QTY	MODEL	Pictures
5	Providing and fixing 18 mm thick HDMRF board with decorative CNC cutting as per approved design, including premium PU (Polyurethane) paint finish, surface preparation, sanding, primer coating, smooth finishing, necessary hardware fittings, adhesives, cutting, edge finishing, assembly, installation, alignment and complete labour charges, finished in the approved colour and design as per actual site measurements.	500 SQ FT	E5	
6	Providing and fixing premium aluminium frame shutters with 12 mm thick fluted glass, including black powder-coated aluminium frame finish, warm-tone fluted glass as per approved design, necessary hardware fittings, glass beading, rubber gaskets, sealant, cutting, edge finishing, assembly, installation, alignment and complete labour charges, finished as per approved colour, design and actual site measurements.	600 SQ FT	E6	
7	Providing and fixing premium 18 mm thick plywood with wooden laminate press finish and decorative CNC cutting as per approved design, including 12 mm thick warm-tone fluted glass fitted in CNC-cut wooden shutters, internal laminate finish, necessary hardware fittings, glass beading, rubber gaskets, adhesives, sealants, edge banding, precision CNC cutting, assembly, installation, alignment, smooth finishing assembly, installation charges, finished as per approved design, selected colour and actual site measurements.	600 SQ FT	E7	

SR NO	Description	PER SQ FT/QTY	MODEL	Pictures
8	Providing and fixing slim tandem box with soft-close channel, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	1800 QTY 1	E8	
9	Providing and fixing universal magic corner unit with smooth pull-out mechanism, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	14700 QTY 1	E9	
10	Providing and fixing bottle pullout unit with multi-storage shelves, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	5104 QTY 1	E10	
11	Providing and fixing pantry unit with multi-level storage shelves, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	18000 QTY 1	E11	
12	Providing and fixing swing corner unit with smooth rotating shelves, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	9000 QTY 1	E12	
13	Providing and fixing wicker basket unit with smooth sliding mechanism, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	11000 QTY 3	E13	

SR NO	Description	PER SQ FT/QTY	MODEL	Pictures
14	Providing and fixing premium glass pulldown unit with smooth lift-down mechanism, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	18000 QTY 1	E14	
15	Providing and fixing PVC rolling shutter unit with smooth rolling mechanism, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	13000 QTY 1	E15	
16	Providing and fixing cutlery tray with multi-compartment organizer, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	2000 QTY 1	E16	
17	Providing and fixing dish rack (GIPT) in stainless steel with plate, bowl and glass storage, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	4500 QTY 1	E17	
18	Providing and fixing dustbin unit (swing & pullout) with smooth sliding mechanism, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	12000 QTY 1	E18	
19	Providing and fixing thali, plate and saucer insert with stainless steel wire rack, including necessary hardware fittings, cutting, assembly, installation, alignment and complete labour charges, finished as per approved design and actual site measurements.	2100 QTY 1	E19	
20	Providing and fixing anti-skid drawer mat with premium finish, including cutting, fitting, alignment and complete labour charges, finished as per approved design and actual site measurements.	3000 QTY 1	E20	

SR NO	Description	PER SQ FT/QTY	MODEL	Pictures
21	Providing and fixing artificial marble as per approved design and actual site measurements, including necessary cutting, sizing, edge finishing, surface preparation, application of approved marble-fixing adhesive, proper alignment, levelling, joint filling, sealing, polishing, finishing, necessary materials, tools, transportation, installation and complete labour charges, finished as per approved colour, design and site requirements.	10000 20 SQFT	E21	   
22	Providing and carrying out complete dismantling and demolition of existing kitchen structures, including breaking of brick/block walls, RCC or masonry kitchen counters (subject to structural approval), removal of existing granite/ artificial marble countertops, wall and floor tiles, kitchen platforms, cabinets, shelves, sink, plumbing fittings, electrical fixtures and other unwanted kitchen installations, including necessary cutting, chipping, hammering, removal of old materials, collection of debris, loading, shifting and disposal to an approved dumping location, protection of adjoining surfaces, site cleaning, necessary tools, equipment, safety precautions and complete labour charges, as per actual site requirements and approved work scope.	8000 Lump Sum	E22	   
23	Providing and carrying out wall breaking, cutting, chasing and drilling for concealed electrical and plumbing points, including making grooves for PVC electrical conduits, switchboards, socket boxes, water supply pipes, hot and cold water pipelines, drainage pipes, sink connections and other plumbing fittings, including necessary wall cutting, box cutting, pipe groove cutting, cement mortar filling, surface levelling, finishing, debris removal, necessary tools, equipment and complete labour charges as per approved electrical and plumbing layout and actual site requirements.	300 RFT	E23	     

SR NO	Description	PER SQ FT/QTY	MODEL	Pictures
21	Kohler Strive™ Kitchen Sink | 1.2 mm Thick Stainless Steel Single Bowl with SilentShield™ | 10" Deep, Round Corners for Easy Cleaning | 30x18x10 inches, Brushed Matte Steel Providing and fixing complete with necessary cutting, installation, plumbing connection, sealant and labour charges.	18000 QTY 1	E24	 
22	Kohler Strive™ Kitchen Sink | 1.2 mm Thick Stainless Steel Double Equal Bowl with SilentShield™ | 9" Deep, Round Corners for Easy Cleaning | 36x18x9 inches, Brushed Matte Steel Providing and fixing complete with necessary cutting, installation, plumbing connection, sealant and labour charges.	17000 QTY 1	E25	 
23	Johnson Qubix Black Quartz Kitchen Sink with Waste Coupling | 24" x 18" x 9.5" | 5 Years Warranty | Durable and Stylish Quartz Sink for Modern Kitchens Providing and fixing complete with necessary cutting, installation, plumbing connection, sealant and labour charges.	8000 QTY 1	E26	 
24	SEER switch plate Black Modular Switch and Socket Combo, 16A Switch with 6/16A 3-Pin Socket, Gold Trim Providing and fixing complete with necessary cutting, installation and labour charges.	700 QTY 1	E27	
25	LED STRIP LIGHT Providing and fixing LED strip light with aluminium profile, wiring, transformer and complete installation and labour charges as per approved design.	800 RFT	E28	

Experience the

Essence of Everyday

The Essential Series is more than just a kitchen.
It's a perfect blend of style, storage and simplicity,
crafted to suit the way you live.

Beautifully designed. Thoughtfully made.

Made for you.

VISIT TODAY
Step into our experience center and explore the Essential Kitchen in person.

VISIT OUR WEBSITE
https://santoshiinteriors.in/

FOLLOW US

@essentialkitchens

OUR EXPERIENCE CENTER

SIMPLE, FUNCTIONAL, BEAUTIFUL.